

IM-50BAA-LM

LARGE 2" SQUARE CUBE ICE MACHINE WITH BUILT-IN STORAGE BIN



IM-50BAA-LM 06/01/21 Item # 13543

WxDxH 193/4" x 173/4" x 391/2"* *with 6" legs





Diameter Cube Weight 4.2oz











Features

Item #:-Project: _ Qty: AIA#:

- Small footprint can easily fit under bar counter
- Cubes have superior chilling ability and beautiful appearance
- Clear, solid 1.9" x 1.9" x 2.3" cube
- Up to 50 lbs. of ice production per 24 hours
- · Built-in storage bin with 22 lb. capacity
- · Durable stainless steel exterior
- · Easy to clean air filter
- Foam injected polyurethane for insulation (HFC free)
- · Closed water circuit offers the ultimate contamination protection
- · Ice scoop included
- 6.5' power cord with NEMA 5-15P plug


Warranty

- · 3 year Parts & Labor on entire machine.
- 5 year Parts on Compressor; air-cooled condenser coil. Valid in United States, Canada, Puerto Rico & U.S. Territories. Contact factory for warranty in other countries.

Shipping: (LxWxH) 24" x 22" X 38"H Volume: 11.61ft3

| | | | ICE PRODUCTION | | WATER USAGE | | | | | | | | |
|---|-----------|-------------|----------------|-----------------------------------|--|---|---------------------------------------|--|----------|-----------|------------------------------|------------------------------|-----------------------------|
| C | Condenser | Model | Lbs. per | ter Temp 24 hours 90°/ 70°F | Potable Gal. per 24 hrs. 90°/ 70°F | Condenser Gal. per 100 lbs. 90°/ 70°F | kWh Used per 100 lbs. 90°/ 70°F | Max. Fuse Sz or HACR Circuit Bkr | Amperage | Voltage | Heat Rejection BTU/hr. | Refrigerant Charge Amount | Net / Ship Weight (lbs.) |
| | Air | IM-50BAA-LM | 50 | 45 | 22 | N/A | 15.7 | 15A | 5.0A | 115V/60/1 | 1500 | R134a / 6.0oz | 115 / 137 |

2by2 Cube Dimensions*



Operating Limits

· Ambient Temp Range 45 - 100°F

 Water Temp Range 45 - 90°F · Water Pressure 10 - 113 PSIG

· Voltage Range 104 - 127V

Service

- · Removable/cleanable air filter
- · Panels easily removed and all components accessible for service.

Plumbing

- Icemaker Water Supply Line: Minimum 1/2" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 3/4" Nominal ID Hard Pipe or Equivalent

Clearance

• Minimum clearance: Allow 6" (15 cm) from Top and Rear. Allow 6" (15 cm) on left side and 0" on right side or 0" on left side and 6" (15 cm) on right side.

Water Filter


Please refer to water filter specification sheet for recommendations.




IM-50BAA-LM 06/01/21 Item # 13543

LARGE 2" SQUARE CUBE ICE MACHINE WITH BUILT-IN STORAGE BIN


FRONT VIEW



REAR VIEW

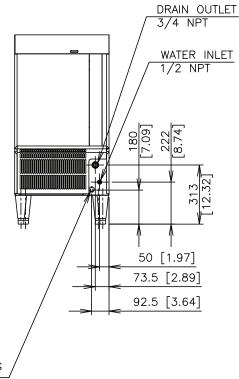

POWER SUPPLY CORD 2.0m[6.56 ft] LONG

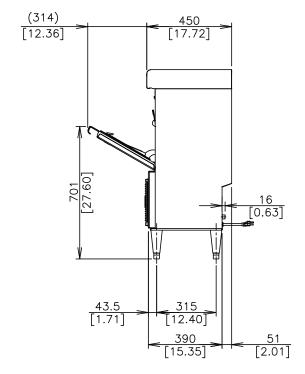

TOP VIEW

